

# Indicator with Printer SI400P



Improved convenience


Selectable power supply types(AC/DC)

Various optional cards can be added


External input 6ea




주식회사 세화씨엔엠  
SEWHACNM Co., Ltd.

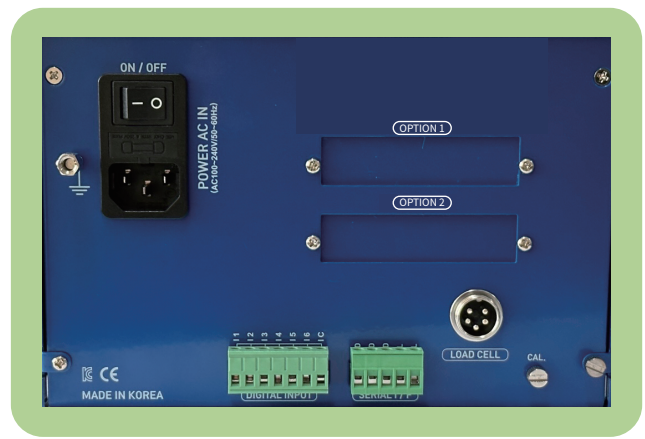


## Dimension & Feature

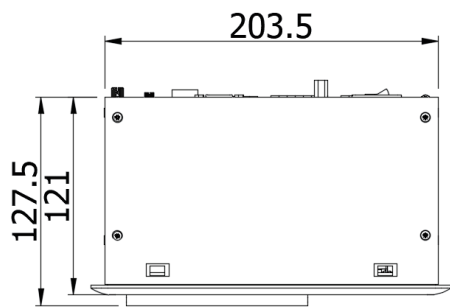

<Top View>

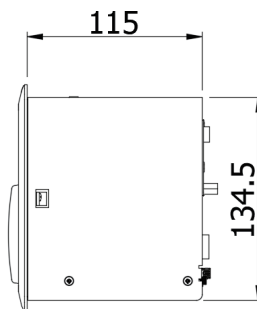

<Side View>

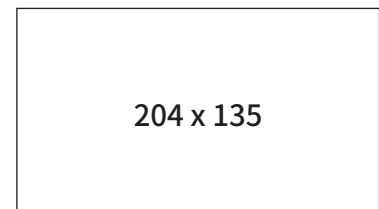

<Cutting Size>

Analog	Input Sensitivity	Min 0.1 $\mu$ V / Digit
	Load Cell Excitation	DC 5V
	Non-Linearity	0.001% of full scale
	Input Signal	Max 3.0mV/V
	A/D Sampling	Max 120time/sec, Sigma-Delta
	Resolution	Internal : 1/2,000,000 External : 1/20,000
Display	Main Display	7 segments, 6 digits, Red FND, Letter height : 25.4mm
	LED Lamp	Green(IN1~6)
	Under Zero	Minus(-) display
General	Power Supply	AC Free Voltage(AC100V~240V, 50/60Hz)
	Operation Condition	-10°C ~ +40°C, 85% RH Under
	Size/Weight	220(W) x 134.5(H) x 127.5(D) / 1.2kg
	Interface	RS232C, Current Loop
	Input	6ea
	Option	- Serial (RS232C, RS422, RS485) - Ethernet (TCP/IP) - Analog output (Iout(4~20mA), Vout(0~10V)) - Parallel(BCD IN, BCD OUT) - SD memory card
Printer	Print Method	Direct thermal print and auto paper feed
	Printing Density	384 dots/line , 8 dots/mm
	Printer Speed	85 mm/s (max.)
	Font Size	0.75x1 mm
	Paper	58(W)x Ø38 Thermal paper (Printing width : 48mm)